



## Actuated Valves Technical Options & Accessories Overview

The basic options and accessories listed in this section represent many of the most commonly used for Pneumatic actuation of Ball Valves and Butterfly Valves (see next section for Pneumatic Diaphragm Valves) factory configured to order on the actuation package. Contact Spears® for any desired accessories, options, functions, or special controls not listed.

### Overview of Basic Options & Accessories Available

Standard Pneumatic Actuator Features	Premium Pneumatic True Union Ball Valves	Premium Pneumatic Butterfly Valves
Spring Return (Fail Safe)	✓	✓
40 or 60 psi Operating Pressure	✓	✓
Declutchable Manual Override	✓	✓
Pneumatic Positioner	✓	✓
Electro-Pneumatic Positioner	✓	✓
Transmitter	✓	✓
Dome Position Indicator	✓	✓
Mechanical Limit Switches	✓	✓
Output Signal Mechanical Limit Switches	✓	✓
Output Signal Proximity Limit Switches	✓	✓
3 & 4-Way Solenoid Valve	✓	✓
Dual Power 3 & 4-Way Solenoid Valve	✓	✓
Stainless Steel 3-Gauge Set	✓	✓
ID Tag - SS	✓	✓

**Contact Spears® for any desired accessories, options, functions,  
or special controls not listed in this guide.**

#### Spring Return (Fail Safe) (Air-to-Open or Air-to-Close) Option

An internal spring in the actuator is configured to either open or close upon loss of air supply. Spring return can be specified as either Air-to-Open (fail-close) when spring return close is desired or Air-to-Close (fail-open) when spring return open is desired.

#### Operating Pressure Option

Standard ball and butterfly valve actuators require an 80 psi supply pressure. With this option, the actuator is configured for lower supply pressures of either 40 psi or 60 psi (must specify).

Actuated Valves Technical  
**Options & Accessories Overview**




**3 to 15 psi Pneumatic Positioner  
 (for Ball & Butterfly Valves)**

Positioner is used to control or throttle flow by modulating the air to the actuator in response to an external 3-15 psi control signal input. Available with NEMA 4 or 4X rated enclosure mounted on top of actuator with flat top green/black indicator or optional high visibility Dome Indicator. Includes pressure gauge set of one (1) input gauge 0-30 psi and two (2) output gauges 0-160 psi. Optional Stainless Steel gauge set available.



**Dome Indicator**

Dome style beacon with high visibility green/red indicator for improved viewing of valve position. Indicator only. Note: Dome indicators may be included with certain selections of positioners or limit switches.

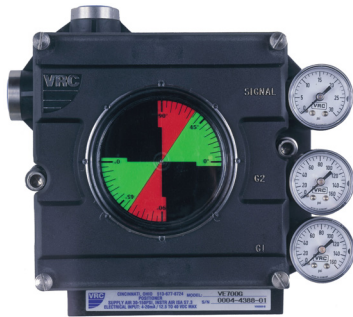

**Electro-Pneumatic Positioner  
 4-20mA, 0-5 VDC, or 0-10 VDC**

Positioner is used to control or throttle flow by modulating the air to the actuator in response to an external 4-20 milliamp (current), 0-5 VDC (resistive), or 0-10 VDC (resistive) control signal input which is converted to a proportional 3 - 15 psi pneumatic signal used by the positioner. Available with NEMA 4, 4X, 7 or Intrinsically Safe NEMA 7 rated enclosure mounted on top of actuator with flat top green/black indicator or dome indicator with green/red 180° high visibility. Includes pressure gauge set of one (1) input gauge 0-30 psi and two (2) output gauges 0-160 psi. Optional Stainless Steel gauge set available.



**3 & 4-Way Solenoid Valves**

This combination valve operates either as a 3-way or 4-way pilot valve mounted to the actuator. The 3-way valve is a normally closed poppet design to insure tight shut-off. These valves are designed for use with spring return actuators. The 4-way valve can be used as either a 4-way 2 position design or a 3-way normally closed design merely by rotating a gasket located in the sub-base prior to assembly to the actuator. The 3-way operation routes the exhaust pressure to the spring side of the actuator to prevent corrosion problems within the actuator. An optional speed control can be purchased. Air inlet connection is 1/4" NPT. Thermoplastic composite enclosure is NEMA 4, 4x (standard) or NEMA 4, 4x, 7, 9 combination with 1/2" male conduit connection. Standard 115 VAC with voltage options of 230 VAC, 24 VAC, 12 VDC, and 24 VDC.



## Actuated Valves Technical Options & Accessories Overview




### Dual Power Solenoid Valves

This configuration of 3 & 4-way solenoid valves accepts two separate power sources, one to open and one to close the valve, for use on Air-to-Air (double acting) actuators only.



### Limit Switch with Indicator

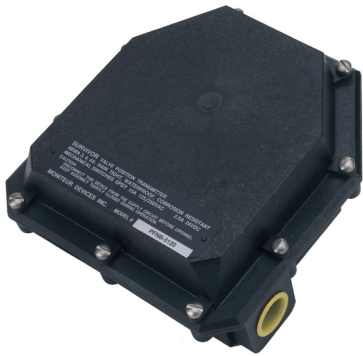

### Output Signal Limit Switches

Mechanical SPDT (2) or DPDT (2)  
Proximity SPDT (2) or DPDT (2)

Set of two (2) auxiliary limit switches. Switches deliver a specified output current signal of 4-20mA or resistive signals of 0-5 or 0-10 VDC. Mechanical switches are SPDT or DPDT rated at 10 amp 125/250 VAC. Proximity (non-contact) switches are SPDT or DPDT rated at 1 amp 120 VAC. These limit switches are available with or without 180° visual indicator. Switch enclosure is NEMA 4/4x or NEMA 7/9 rated.



### Stainless Steel Gauge Set

Three (3) gauge set. Stainless steel gauge replacement for use on Pneumatic and Electro-Pneumatic Positioners. Includes one (1) input pressure gauge 0-30 psi, and two (2) output pressure gauges 0-160 psi.



### Custom ID Tag

Stainless steel valve/actuator ID Tag imprinted to user specified identification criteria. Each tag is 1/2" x 3" and accommodates up to 3 lines of text, maximum of 12 characters and spaces per line.



### Transmitter

The Transmitter is an internally mounted module for use in the Positioner. The module is designed to give a 4-20 milliamp linear output signal with a 0-90° Positioner shaft rotation. The unit is environmentally sealed and loop powered. Transmitter is designed for use in General Purpose Locations and is not approved for Hazardous Locations as classified by the NEC.