



Expansion Joints




PRODUCT

Contact Spears® for any Information not found.

Expansion Joints Product
Fabricated Expansion Joints



Fabricated Expansion Joints
Triple O-ring Sealed Telescoping Design
 Available with 6" and 12" Travel

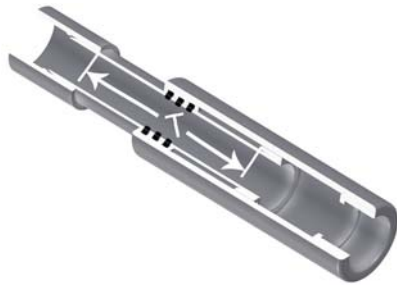

- Compact Installation - Eliminates Need For Expansion Loops
- EPDM or FKM Pressure O-ring Seal with Dual "Wiper" O-ring for Extended Life
- Support Piston Eliminates Binding, Minimizes Alignment Problems
- Excellent For Use as a Repair Coupling
- WHEN USED AS A REPAIR COUPLING MUST BE THRUST BLOCKED

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------



Fabricated Expansion Joints - PVC

6" Travel with EPDM O-rings

1/2" - 2" 235 psi @ 73°F (23°C)
 2-1/2" - 12" 150 psi @ 73°F (23°C)
 14" 100 psi @ 73°F (23°C)

826-005X6	1/2	6	10	0	085	365.11
826-007X6	3/4	6	6	0	085	392.49
826-010X6	1	6	5	0	085	396.92
826-012X6	1-1/4	6	4	0	085	461.35
826-015X6	1-1/2	6	4	0	085	489.21
826-020X6	2	6	2	0	085	547.22
826-025X6	2-1/2	6	1	0	085	624.18
826-030X6	3	6	1	0	085	647.93
826-040X6	4	6	1	0	085	695.35
826-060X6	6	6	1	0	085	1145.59
826-080X6	8	6	1	0	085	1577.15
826-100X6	10	6	1	0	085	1852.02
826-120X6	12	6	1	0	085	3281.57
826-140X6	14	6	1	0	085	3748.44

FKM O-rings available on special order. Add a "V" preceding the dash (-) separator, e.g. 826V-005X6.

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Fabricated Expansion Joints - PVC

12" Travel with EPDM O-rings

1/2" - 2" 235 psi @ 73°F (23°C)
 2-1/2" - 12" 150 psi @ 73°F (23°C)
 14" 100 psi @ 73°F (23°C)

826-005X12	1/2	12	10	0	085	410.68
826-007X12	3/4	12	6	0	085	434.34
826-010X12	1	12	5	0	085	520.47
826-012X12	1-1/4	12	4	0	085	568.67
826-015X12	1-1/2	12	4	0	085	526.93
826-020X12	2	12	2	0	085	621.57
826-025X12	2-1/2	12	1	0	085	1044.22
826-030X12	3	12	1	0	085	803.01
826-040X12	4	12	1	0	085	902.11
826-060X12	6	12	1	0	085	1314.11
826-080X12	8	12	1	0	085	1761.82
826-100X12	10	12	1	0	085	2153.95
826-120X12	12	12	1	0	085	3450.01
826-140X12	14	12	1	0	085	3829.44

FKM O-rings available on special order. Add a "V" preceding the dash (-) separator, e.g. 826V-005X12



Fabricated Expansion Joints - CPVC

6" Travel with FKM O-rings

1/2" - 2" 235 psi @ 73°F (23°C)
 2-1/2" - 12" 150 psi @ 73°F (23°C)
 14" 100 psi @ 73°F (23°C)

826-005X6C	1/2	6	10	0	085	451.43
826-007X6C	3/4	6	6	0	085	493.99
826-010X6C	1	6	5	0	085	533.95
826-012X6C	1-1/4	6	4	0	085	560.83
826-015X6C	1-1/2	6	4	0	085	611.23
826-020X6C	2	6	2	0	085	774.52
826-025X6C	2-1/2	6	1	0	085	919.08
826-030X6C	3	6	1	0	085	1067.72
826-040X6C	4	6	1	0	085	1574.74
826-060X6C	6	6	1	0	085	1692.80
826-080X6C	8	6	1	0	085	3211.18
826-100X6C	10	6	1	0	085	4099.45
826-120X6C	12	6	1	0	085	5438.26
826-140X6C	14	6	1	0	085	11615.99

EPDM O-rings available on special order. Add an "E" preceding the dash (-) separator, e.g. 826E-005X6C





Expansion Joints Product

Fabricated Expansion Joints & Elastomer Expansion Joints

Fabricated Expansion Joints

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------



Fabricated Expansion Joints - CPVC

12" Travel with FKM O-rings

1/2" - 2" 235 psi @ 73°F (23°C)
 2-1/2" - 12" 150 psi @ 73°F (23°C)
 14" 100 psi @ 73°F (23°C)

826-005X12C	1/2	12	10	0	085	459.78
826-007X12C	3/4	12	6	0	085	527.25
826-010X12C	1	12	5	0	085	562.46
826-012X12C	1-1/4	12	4	0	085	629.55
826-015X12C	1-1/2	12	4	0	085	706.02
826-020X12C	2	12	2	0	085	901.19
826-025X12C	2-1/2	12	1	0	085	1364.29
826-030X12C	3	12	1	0	085	1096.42
826-040X12C	4	12	1	0	085	1816.22
826-060X12C	6	12	1	0	085	2000.81
826-080X12C	8	12	1	0	085	3830.73
826-100X12C	10	12	1	0	085	4487.83
826-120X12C	12	12	1	0	085	6420.77
826-140X12C	14	12	1	0	085	15285.59

EPDM O-rings available on special order. Add an "E" preceding the dash (-) separator, e.g. 826E-005X12C

Elastomer Expansion Joints
PVC & CPVC Schedule 80 Elastomer Expansion Joint



Designed to allow for the expansion, contraction, lateral and angular movement of a piping system. Aids in noise and vibration dampening.

- Convenient, Double Union End Connections with Strong, Buttress Thread Union Nuts
- Internal Nylon Cord Reinforced Elastomer Bellows Tube
- Chemically Resistant Neoprene Elastomer with Optional EPDM Tube Available
- Double Spherical Arch Bellows Provides Improved Movement Capability
- Pressure rated to 150 psi @ 73°F (23°C)
- Suitable for Vacuum Service
- Available in Socket or Spears® Special Reinforced (SR) Female Plastic Thread End Connectors, IPS Sizes 3/4" through 3"

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Elastomer Expansion Joint - PVC

PVC with Neoprene Bellows Socket



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ02-007	3/4	10	0	085	230.76
EJ02-010	1	10	0	085	261.66
EJ02-012	1-1/4	15	0	085	278.78
EJ02-015	1-1/2	10	0	085	343.21
EJ02-020	2	8	0	085	420.57
EJ02-025	2-1/2	4	0	085	594.95
EJ02-030	3	2	0	085	817.81

Elastomer Expansion Joints - PVC

PVC with EPDM Bellows Socket



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ22-007	3/4	10	0	085	235.46
EJ22-010	1	10	0	085	266.97
EJ22-012	1-1/4	15	0	085	287.40
EJ22-015	1-1/2	10	0	085	349.17
EJ22-020	2	8	0	085	429.15
EJ22-025	2-1/2	4	0	085	607.06
EJ22-030	3	2	0	085	834.47

Elastomer Expansion Joint - PVC

PVC with Neoprene Bellows SR Fipt - Stainless Steel Collar



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ01-007SR	3/4	10	0	085	233.99
EJ01-010SR	1	10	0	085	266.47

Expansion Joints Product
Elastomer Expansion Joints & Repair Couplings



Elastomer Expansion Joints

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Elastomer Expansion Joint - PVC (continued)

PVC with Neoprene Bellows SR Fipt - Stainless Steel Collar

EJ01-012SR	1-1/4	15	0	085	289.83
EJ01-015SR	1-1/2	10	0	085	370.01
EJ01-020SR	2	8	0	085	444.54
EJ01-025SR	2-1/2	4	0	085	647.80
EJ01-030SR	3	2	0	085	871.19

Elastomer Expansion Joint - PVC

PVC with EPDM Bellows SR Fipt - Stainless Steel Collar



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ21-007SR	3/4	10	0	085	238.74
EJ21-010SR	1	10	0	085	271.93
EJ21-012SR	1-1/4	15	0	085	295.78
EJ21-015SR	1-1/2	10	0	085	377.53
EJ21-020SR	2	8	0	085	453.62
EJ21-025SR	2-1/2	4	0	085	657.34
EJ21-030SR	3	2	0	085	888.97

Elastomer Expansion Joint - CPVC

CPVC with EPDM Bellows Socket



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ22-007C	3/4	10	0	085	240.14
EJ22-010C	1	10	0	085	273.99
EJ22-012C	1-1/4	15	0	085	299.38
EJ22-015C	1-1/2	10	0	085	366.76
EJ22-020C	2	8	0	085	457.75
EJ22-025C	2-1/2	4	0	085	668.91
EJ22-030C	3	2	0	085	908.59

Elastomer Expansion Joint - CPVC

CPVC with EPDM Bellows SR Fipt - Stainless Steel Collar




150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ21-007CSR	3/4	10	0	085	242.86
EJ21-010CSR	1	10	0	085	279.28
EJ21-012CSR	1-1/4	15	0	085	308.62
EJ21-015CSR	1-1/2	10	0	085	393.38
EJ21-020CSR	2	8	0	085	519.97
EJ21-025CSR	2-1/2	4	0	085	722.13
EJ21-030CSR	3	2	0	085	961.77

Repair Couplings

(S119) Socket x Socket

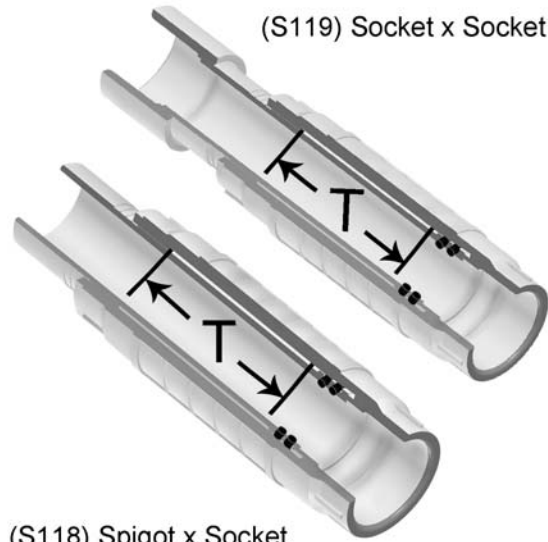

(S118) Spigot x Socket

- Multi-function Telescoping Design
- Regular and Short configurations
- Socket x Socket Configuration for Pipe Repair or Use as a Short-Stroke Expansion Joint
- Spigot x Socket Configuration for Replacing Damaged Fittings
- Both Configurations can be Easily Modified for Opposite Use
- Double O-ring Seal in EPDM or high-grade FKM
- 1/2" - 2" Pressure Rated to 235 PSI @ 73°F (23°C)
- 2-1/2" - 4" Pressure Rated to 200 PSI @ 73°F (23°C)
- 6" Pressure Rated to 150 PSI @ 73°F (23°C)
- NSF® Certified for Potable Water Use

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Repair Coupling - Spigot x Socket

PVC White with EPDM O-ring



Can be used as short-stroke Expansion Joint

S118-05	1/2	3	25	0	025	6.48
S118-07	3/4	4	30	0	025	7.37
S118-10	1	4	15	0	025	8.49



Repair Couplings & Short Repair Couplings

Repair Couplings

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Repair Coupling - Spigot x Socket (continued)

PVC White with EPDM O-ring

S118-12	1-1/4	4	25	0	025	16.02
S118-15	1-1/2	4	25	0	025	17.45
S118-20	2	4	12	0	025	26.99
S118-25	2-1/2	6	5	0	025	39.16
S118-30	3	6	4	0	025	48.92
S118-40	4	6	2	0	025	85.61
S118-60	6	6	1	0	025	209.47

Unit Must Be Thrust Blocked
T = Repair Coupling Travel



Repair Coupling - Socket x Socket

PVC White with EPDM O-ring

Can be used as short-stroke Expansion Joint

S119-05	1/2	3	30	0	025	6.48
S119-07	3/4	4	24	0	025	7.37
S119-10	1	4	20	0	025	8.49
S119-12	1-1/4	4	10	0	025	16.02
S119-15	1-1/2	4	16	0	025	17.45
S119-20	2	4	10	0	025	26.99
S119-25	2-1/2	6	5	0	025	39.16
S119-30	3	6	4	0	025	48.92
S119-40	4	6	2	0	025	85.61
S119-60	6	6	1	0	025	209.47

Unit Must Be Thrust Blocked
T = Repair Coupling Travel

Short Repair Couplings

Space Saving, Compact Version of Standard Repair Coupling
 Requires 1/3 less Space



Repair Coupling - Short, Spigot x Socket

PVC White with EPDM O-ring

SH118-05	1/2	2	36	0	025	6.48
SH118-07	3/4	2-1/4	30	0	025	7.37
SH118-10	1	2	35	0	025	8.49
SH118-12	1-1/4	2-1/2	25	0	025	16.02
SH118-15	1-1/2	2-3/4	32	0	025	17.45
SH118-20	2	3-1/4	15	0	025	26.99

Unit Must Be Thrust Blocked
T = Repair Coupling Travel

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Repair Coupling - Short, Socket x Socket

PVC White with EPDM O-ring

SH119-05	1/2	2	40	0	025	6.48
SH119-07	3/4	2	30	0	025	7.37
SH119-10	1	2	30	0	025	8.49
SH119-12	1-1/4	2-1/2	20	0	025	16.02
SH119-15	1-1/2	2-3/4	21	0	025	17.45
SH119-20	2	3-1/4	12	0	025	26.99


Unit Must Be Thrust Blocked
T = Repair Coupling Travel



Expansion Joints Product
CTS CPVC Expansion Joint/Repair Coupling



CTS CPVC Expansion Joint/Repair Coupling

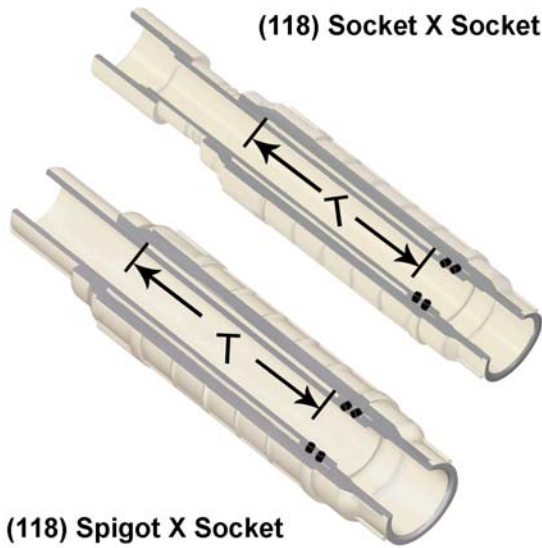

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Expansion Joint/Repair Couplings - Socket x Socket

CPVC With EPDM O-Rings

NSF® Certified Lead Free

CTS119-07	3/4	2-17/32	30	0	027	16.33
CTS119-10	1	3-29/32	24	0	027	18.53

**Unit Must Be Thrust Blocked
 T = Repair Coupling Travel**



- Multi-function Telescoping Design
- Socket x Socket Configuration for Pipe Repair or Use as an Expansion Joint
- Spigot x Socket Configuration for Replacing Damaged Fittings
- Both Configurations can be Easily Modified for Opposite Use
- Double O-ring Seal in EPDM
- Pressure Rated to 100 PSI @ 180°F (82°C)
- NSF® Certified for Potable Water Use

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Expansion Joint/Repair Couplings - Socket x Spigot

CPVC With EPDM O-Rings

NSF Certified Lead Free

CTS118-07	3/4	3-29/32	30	0	027	16.33
CTS118-10	1	3-29/32	24	0	027	18.53

**Unit Must Be Thrust Blocked
 T = Repair Coupling Travel**

