

Expansion Joints Product  
**Elastomer Expansion Joints & Repair Couplings**



**Elastomer Expansion Joints**

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

**Elastomer Expansion Joint - PVC (continued)**

**PVC with Neoprene Bellows SR Fipt - Stainless Steel Collar**

EJ01-012SR	1-1/4	15	0	085	275.34
EJ01-015SR	1-1/2	10	0	085	351.51
EJ01-020SR	2	8	0	085	422.31
EJ01-025SR	2-1/2	4	0	085	615.41
EJ01-030SR	3	2	0	085	827.63

**Elastomer Expansion Joint - PVC**

**PVC with EPDM Bellows SR Fipt - Stainless Steel Collar**



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ21-007SR	3/4	10	0	085	226.80
EJ21-010SR	1	10	0	085	258.33
EJ21-012SR	1-1/4	15	0	085	280.99
EJ21-015SR	1-1/2	10	0	085	358.65
EJ21-020SR	2	8	0	085	430.94
EJ21-025SR	2-1/2	4	0	085	624.47
EJ21-030SR	3	2	0	085	844.52

**Elastomer Expansion Joint - CPVC**

**CPVC with EPDM Bellows Socket**



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ22-007C	3/4	10	0	085	228.13
EJ22-010C	1	10	0	085	260.29
EJ22-012C	1-1/4	15	0	085	284.41
EJ22-015C	1-1/2	10	0	085	348.42
EJ22-020C	2	8	0	085	434.86
EJ22-025C	2-1/2	4	0	085	635.46
EJ22-030C	3	2	0	085	863.16

**Elastomer Expansion Joint - CPVC**

**CPVC with EPDM Bellows SR Fipt - Stainless Steel Collar**




150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ21-007CSR	3/4	10	0	085	230.72
EJ21-010CSR	1	10	0	085	265.32
EJ21-012CSR	1-1/4	15	0	085	293.19
EJ21-015CSR	1-1/2	10	0	085	373.71
EJ21-020CSR	2	8	0	085	493.97
EJ21-025CSR	2-1/2	4	0	085	686.02
EJ21-030CSR	3	2	0	085	913.68

**Repair Couplings**

(S119) Socket x Socket

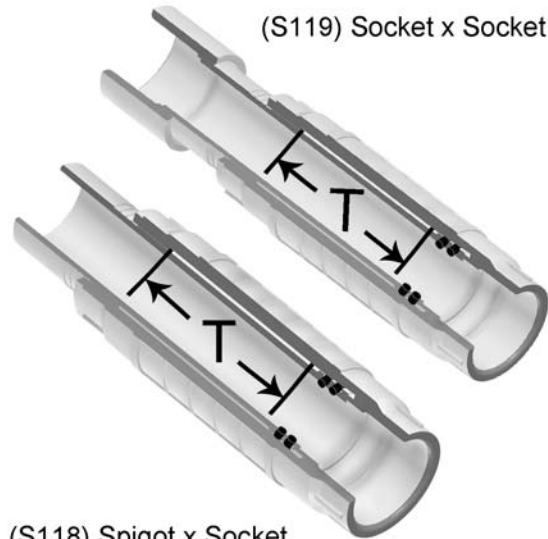

(S118) Spigot x Socket

- Multi-function Telescoping Design
- Regular and Short configurations
- Socket x Socket Configuration for Pipe Repair or Use as a Short-Stroke Expansion Joint
- Spigot x Socket Configuration for Replacing Damaged Fittings
- Both Configurations can be Easily Modified for Opposite Use
- Double O-ring Seal in EPDM or high-grade FKM
- 1/2" - 2" Pressure Rated to 235 PSI @ 73°F (23°C)
- 2-1/2" - 4" Pressure Rated to 200 PSI @ 73°F (23°C)
- 6" Pressure Rated to 150 PSI @ 73°F (23°C)
- NSF® Certified for Potable Water Use

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

**Repair Coupling - Spigot x Socket**

**PVC White with EPDM O-ring**



Can be used as short-stroke Expansion Joint

S118-05	1/2	3	25	0	025	6.16
S118-07	3/4	4	30	0	025	7.00
S118-10	1	4	15	0	025	8.07



## Repair Couplings & Short Repair Couplings

### Repair Couplings

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

#### Repair Coupling - Spigot x Socket (continued)

**PVC White with EPDM O-ring**

S118-12	1-1/4	4	25	0	025	15.22
S118-15	1-1/2	4	25	0	025	16.58
S118-20	2	4	12	0	025	25.64
S118-25	2-1/2	6	5	0	025	37.20
S118-30	3	6	4	0	025	46.47
S118-40	4	6	2	0	025	81.33
S118-60	6	6	1	0	025	199.00

**Unit Must Be Thrust Blocked**  
**T = Repair Coupling Travel**



#### Repair Coupling - Socket x Socket

**PVC White with EPDM O-ring**

Can be used as short-stroke Expansion Joint

S119-05	1/2	3	30	0	025	6.16
S119-07	3/4	4	24	0	025	7.00
S119-10	1	4	20	0	025	8.07
S119-12	1-1/4	4	10	0	025	15.22
S119-15	1-1/2	4	16	0	025	16.58
S119-20	2	4	10	0	025	25.64
S119-25	2-1/2	6	5	0	025	37.20
S119-30	3	6	4	0	025	46.47
S119-40	4	6	2	0	025	81.33
S119-60	6	6	1	0	025	199.00

**Unit Must Be Thrust Blocked**  
**T = Repair Coupling Travel**

### Short Repair Couplings

Space Saving, Compact Version of Standard Repair Coupling  
 Requires 1/3 less Space



#### Repair Coupling - Short, Spigot x Socket

**PVC White with EPDM O-ring**

SH118-05	1/2	2	36	0	025	6.16
SH118-07	3/4	2-1/4	30	0	025	7.00
SH118-10	1	2	35	0	025	8.07
SH118-12	1-1/4	2-1/2	25	0	025	15.22
SH118-15	1-1/2	2-3/4	32	0	025	16.58
SH118-20	2	3-1/4	15	0	025	25.64

**Unit Must Be Thrust Blocked**  
**T = Repair Coupling Travel**

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

#### Repair Coupling - Short, Socket x Socket

**PVC White with EPDM O-ring**

SH119-05	1/2	2	40	0	025	6.16
SH119-07	3/4	2	30	0	025	7.00
SH119-10	1	2	30	0	025	8.07
SH119-12	1-1/4	2-1/2	20	0	025	15.22
SH119-15	1-1/2	2-3/4	21	0	025	16.58
SH119-20	2	3-1/4	12	0	025	25.64

**Unit Must Be Thrust Blocked**  
**T = Repair Coupling Travel**

