

Fabricated Fittings Technical
Bolted Compression Couplings - PIP




Zinc Plated Bolt Pack w/ Galvanized Flanges or
 Stainless Steel w/ Stainless Flanges

Bolt Tightening Sequence
 Recommended Torque to Seal: 12-15 ft-lb



6",8"-4 bolt 10" -5 bolt 12" -6 bolt 15" -7 bolt

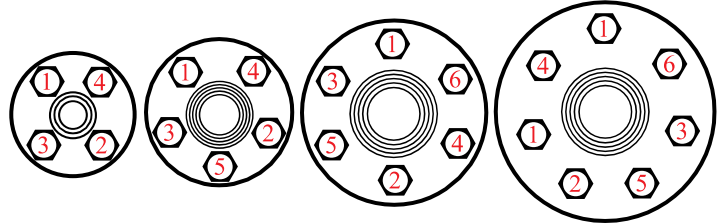


PIP (Plastic Irrigation Pipe)
 100 psi rated

SBR Gasket
 (BUNA-S)

6" - 15" diameter
 12" or 18" length

**Bolted Compression Coupling -
 12" Length**


Bolted Compression x Bolted Compression

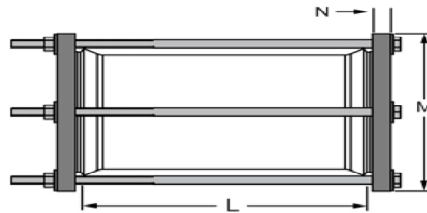

| Part Number | | Size | L | M | N | Approx. Wt. (Lbs.) |
|--------------|---------------|------|----|--------|------|--------------------|
| ZINC | SS316 | | | | | |
| 3028B-060X12 | 3028B-060X12S | 6 | 12 | 9 | 5/16 | 9.36 |
| 3028B-080X12 | 3028B-080X12S | 8 | 12 | 11 | 5/16 | 10.51 |
| 3028B-100X12 | 3028B-100X12S | 10 | 12 | 13-1/8 | 3/8 | 16.29 |
| 3028B-120X12 | 3028B-120X12S | 12 | 12 | 15-1/4 | 3/8 | 20.07 |
| 3028B-150X12 | 3028B-150X12S | 15 | 12 | 18-5/8 | 3/8 | 28.41 |

**Bolted Compression Coupling -
 18" Length**

Bolted Compression x Bolted Compression

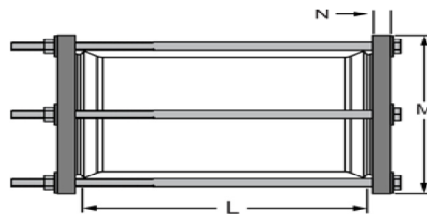

| Part Number | | Size | L | M | N | Approx. Wt. (Lbs.) |
|--------------|---------------|------|----|--------|------|--------------------|
| ZINC | SS316 | | | | | |
| 3028B-060X18 | 3028B-060X18S | 6 | 18 | 11 | 5/16 | 9.71 |
| 3028B-080X18 | 3028B-080X18S | 8 | 18 | 11 | 5/16 | 13.90 |
| 3028B-100X18 | 3028B-100X18S | 10 | 18 | 13-1/8 | 3/8 | 18.61 |
| 3028B-120X18 | 3028B-120X18S | 12 | 18 | 15-1/4 | 3/8 | 27.09 |
| 3028B-150X18 | 3028B-150X18S | 15 | 18 | 18-5/8 | 3/8 | 36.89 |