




**EverTUFF® TURF™ PVC Repair Couplings**

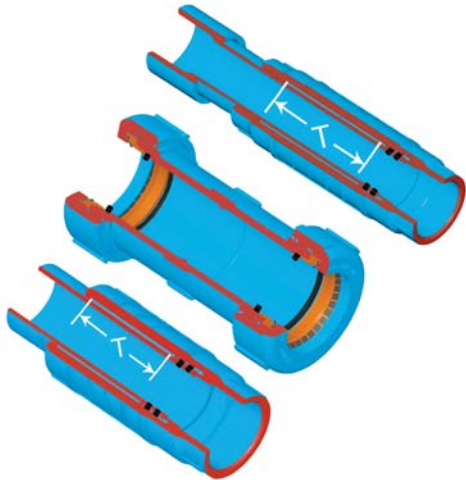

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------


**EverTUFF® TURF™ PVC Repair Coupling - Spigot x Socket**

**EPDM O-rings**

Can be used as a short-stroke Expansion Joint

S118-10T	1	4	15	0	031	13.46
S118-12T	1-1/4	4	25	0	031	25.38
S118-15T	1-1/2	4	25	0	031	27.62
S118-20T	2	4	12	0	031	42.74
S118-25T	2-1/2	6	5	0	031	61.99
S118-30T	3	6	4	0	031	77.45
S118-40T	4	6	2	0	031	135.55
S118-60T	6	6	1	0	031	331.66

**Unit Must Be Thrust Blocked**  
**T= Repair Coupling Travel**



**EverTUFF® TURF™ PVC Features**

- Injection molded from Specially Balanced PVC Material in Distinct Blue color
- Full Class 315 Pressure Rating
- NSF® Certified for Potable Water Use

**GripLoc™ Compression Couplings**

- Uses NO Solvent Cement
- EPDM Sealed Gripper Ring
- Provides Quick, Permanent Connection for Repairs or Extensions

**Expansion Repair Couplings**

- Multi-function Telescoping Design
- Double O-ring Seal in EPDM
- Regular and Short configurations
- Socket x Socket Configuration for Pipe Repair or Use as a Short-Stroke Expansion Joint
- Spigot x Socket Configuration for Replacing Damaged Fittings
- Both Configurations can be Easily Modified for Opposite Use

**Versatile Repair Capability**

Spears® GripLoc™ Compression Couplings use NO solvent cement which provides for immediate repairs of damaged components or system extensions. O-ring sealed stainless steel Gripper Ring forms leak-tight, reliable connections. Spears® Repair Couplings™ provide a variety of system repair and alteration solutions. Use Socket x Socket configurations for quick pipe damage repair - can also be used as a short-stroke expansion joint to compensate for thermal expansion & contraction. Spigot x Socket configurations are excellent for lateral and riser add-ons, damaged fitting replacement, or for installing valves in existing piping systems. Order the wrong configuration? Simply cut coupling from Socket shaft end to function as a spigot or add a coupling to Spigot shaft end for Socket connections.


**EverTUFF® TURF™ PVC Repair Coupling - Socket x Socket**

**EPDM O-rings**

Can be used as a short-stroke Expansion Joint

S119-10T	1	4	20	0	031	13.46
S119-12T	1-1/4	4	10	0	031	25.38
S119-15T	1-1/2	4	16	0	031	27.62
S119-20T	2	4	10	0	031	42.74
S119-25T	2-1/2	6	5	0	031	61.99
S119-30T	3	6	4	0	031	77.45
S119-40T	4	6	2	0	031	135.55
S119-60T	6	6	1	0	031	331.66

**Unit Must Be Thrust Blocked**  
**T= Repair Coupling Travel**



**EverTUFF® TURF™ PVC Short Repair Couplings**

**EverTUFF® TURF™ PVC Repair Coupling - Short, Spigot x Socket**

**EPDM O-ring**

SH118-10T	1	2	35	0	031	13.46
SH118-12T	1-1/4	2-1/2	25	0	031	25.38
SH118-15T	1-1/2	2-3/4	32	0	031	27.62
SH118-20T	2	3-1/4	15	0	031	42.74

**Unit Must Be Thrust Blocked**  
**T= Repair Coupling Travel**





**EverTUFF® TURF™ PVC Short Repair Couplings**

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------



EverTUFF® TURF™ PVC Repair Coupling  
- Short, Socket x Socket

**EPDM O-ring**

SH119-10T	1	2	30	0	031	13.46
SH119-12T	1-1/4	2-1/2	20	0	031	25.38
SH119-15T	1-1/2	2-3/4	21	0	031	27.62
SH119-20T	2	3-1/4	12	0	031	42.74

**Unit Must Be Thrust Blocked**  
**T= Repair Coupling Travel**

**EverTUFF® TURF™ PVC GripLoc™ Compression Couplings**

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

EverTUFF® GripLoc™ Compression Coupling

**WARNING: DO NOT INSERT FINGERS**  
**For Cold Water Only - EPDM O-rings**  
**Pressure Rated 1" - 2" = 235 psi, 3" & Up = 150 psi**  
**When using over rated pressure up to 315 psi MUST BE RESTRAINED**



Hand Tighten ONLY - No Nut Wrenches Required

S112-10T	1	1	20	131	46.74
S112-12T	1-1/4	1	10	131	50.95
S112-15T	1-1/2	1	16	131	59.56
S112-20T	2	1	9	131	70.19
S112-30T	3	1	4	131	120.51
S112-40T	4	1	4	131	136.21