




Short Repair Couplings

Space Saving, Compact Version of Standard Repair Coupling Requires 1/3 less Space

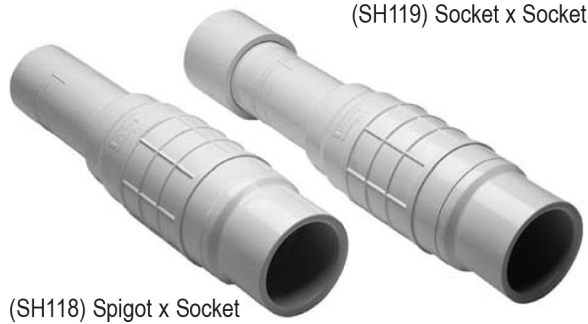

(SH119) Socket x Socket

(SH118) Spigot x Socket

- Compact Telescoping Design
- Socket x Socket Configuration for Pipe Repair or Use as a Short-Stroke Expansion Joint
- Spigot x Socket Configuration for Replacing Damaged Fittings
- Both Configurations can be Easily Modified for Opposite Use
- Available in PVC White, Sizes 1/2" - 2"
- EPDM Double O-ring Seal
- Pressure Rated to 235 PSI @ 73°F (23°C)
- NSF® Certified for Potable Water Use

Repair Coupling - Short, Spigot x Socket

PVC White with EPDM O-ring




Pressure Rating
235 psi @ 73° F

Part Number	Size	L	L2	L3	M	S	Approx. Wt. (Lbs.)
SH118-05	1/2	11/16	5	4-5/16	1-7/16	2	.19
SH118-07	3/4	3/4	5-1/2	4-3/4	1-3/4	2-1/4	.29
SH118-10	1	15/16	5-5/8	4-11/16	2-1/16	2	.39
SH118-12	1-1/4	1	6-1/2	5-1/2	2-7/16	2-1/2	.61
SH118-15	1-1/2	1-1/8	6-13/16	5-11/16	2-11/16	2-3/4	.76
SH118-20	2	1-3/16	8-3/16	7	3-3/16	3-1/4	1.16

Unit Must Be Thrust Blocked

Repair Coupling - Short, Socket x Socket

PVC White with EPDM O-ring



Pressure Rating
235 psi @ 73° F

Part Number	Size	L	L1	L2	L3	M	S	Approx. Wt. (Lbs.)
SH119-05	1/2	11/16	7/8	6	4-3/8	1-7/16	2	.22
SH119-07	3/4	3/4	1	6-9/16	4-3/4	1-3/4	2	.34
SH119-10	1	15/16	1-1/8	6-13/16	4-3/4	2-1/16	2	.47
SH119-12	1-1/4	1	1-1/4	7-7/8	5-9/16	2-7/16	2-1/2	.72
SH119-15	1-1/2	1-1/2	1-3/8	8-3/16	5-11/16	2-11/16	2-3/4	.90
SH119-20	2	1-3/16	1-1/2	9-13/16	7-1/16	3-3/16	3-1/4	1.38

Unit Must Be Thrust Blocked