

Solvent Cements Product
CPVC Low VOC Cements & ABS Low VOC Cements



CPVC Low VOC Cements



FS-5 RED: One-Step (no primer required) CPVC cement specifically formulated and approved for use with Spears® **FlameGuard**® and other approved CPVC Fire Sprinkler Products with interference fit through 3". See publication FG-3, **FlameGuard**® Installation Instructions for additional application details. Listings: ASTM F493, NSF®-PW, DWV, SW, U.P. Code, UL®, FM® Approved.

Maximum 3" size.

FS-5 FlameGuard® One-Step CPVC Cement

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
FS5-020	Pint	12	0	703	31.31
FS5-030	Quart	12	0	703	57.43



LW-5 MUSTARD: One-Step (no primer required) CPVC cement specifically formulated and approved for use with Spears® **LabWaste**® CPVC Corrosive Waste Drainage System Products with interference fit through 24". See Publication LW-4, Technical Information, for application details. Listings: ASTM F493, NSF®-CW, PW, DWV, SW, U.P. Code, ICC-ES PMG.

For use in joining LabWaste® only.

The Only Chemically Resistant Cement Approved for Spears® LabWaste®

LW-5 LabWaste® One-Step CPVC Cement

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
LW5-020	Pint	12	0	704	50.43
LW5-030	Quart	12	0	704	67.22
LW5-040	Gallon	6	0	704	273.48
LW5-050	5 Gallon	1	0	704	1367.48

ABS Low VOC Cements

ABS cements are specially formulated for rigid ABS pipe and fittings in all classes, schedules and fittings having interference type sockets. These medium-bodied, fast setting cements are used for all classes and schedules with interference fit through 8" diameter in ABS drain, waste and vent systems (DWV), and sewer applications. Do not use primer on ABS pipe and fittings.



- Low VOC emissions comply with SCAQMD Rule 1168/316A
- 3-Year Shelf Life

ABS-73 BLACK: Medium bodied, fast setting, high strength ABS solvent cement for all classes and schedules of pipe and fittings with interference fit through 8" diameter. Listings: ASTM D2235, NSF®-DWV, SW, U.P. Code.

ABS-73 Black Medium Body ABS Cement

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
ABS73B-005	1/4 Pint	24	0	708	8.05
ABS73B-010	1/2 Pint	24	0	708	10.86
ABS73B-020	Pint	12	0	708	18.12
ABS73B-030	Quart	12	0	708	29.66
ABS73B-040	Gallon	6	0	708	99.45



ABS-71 YELLOW/MILKY: Medium bodied, fast setting, high strength ABS solvent cement for all classes and schedules of pipe and fittings with interference fit through 8" diameter. Listings: ASTM D2235, NSF®-DWV, SW, U.P. Code, CSA (Yellow Only) B181.1.

ABS-71 Yellow Medium Body ABS Cement

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
ABS71Y-005	1/4 Pint	24	0	708	9.57




Solvent Cements Product

ABS Low VOC Cements & ABS to PVC Transition & Multi Purpose Low VOC Cements

ABS Low VOC Cements

ABS-71 Yellow Medium Body ABS Cement (continued)

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
ABS71Y-010	1/2 Pint	24	0	708	11.44
ABS71Y-020	Pint	12	0	708	20.09
ABS71Y-030	Quart	12	0	708	34.25
ABS71Y-040	Gallon	6	0	708	116.51

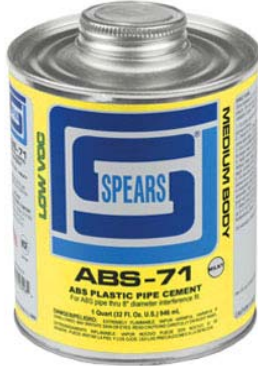

ABS-71 Milky Medium Body ABS Cement

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
ABS71M-005	1/4 Pint	24	0	708	9.57
ABS71M-010	1/2 Pint	24	0	708	11.44
ABS71M-020	Pint	12	0	708	20.09
ABS71M-030	Quart	12	0	708	34.25
ABS71M-040	Gallon	6	0	708	116.51

ABS to PVC Transition & Multi Purpose Low VOC Cements

Designed for joining PVC, ABS, CPVC and Styrene pipe and fittings, involving both similar materials and transition joints between dissimilar plastic materials.

- Low VOC emissions comply with SCAQMD Rule 1168/316A
- 3-Year Shelf Life



ABS TO PVC-94 ABS-PVC GREEN: Medium bodied, fast setting transition cement for all classes and schedules with interference fit through 6" diameter (not for Schedule 80). Specifically designed for use on ABS to PVC transition joints in non-pressure systems. Suitable for sewer and DWV applications. Listings: ASTM D3138, NSF[®]-DWV, SW, U.P. Code.

ABS TO PVC-94 Green Medium Body ABS to PVC Cement

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
TRAN94G-005	1/4 Pint	24	0	708	9.93
TRAN94G-010	1/2 Pint	24	0	708	14.53
TRAN94G-020	Pint	12	0	708	23.64
TRAN94G-030	Quart	12	0	708	40.69
TRAN94G-040	Gallon	6	0	708	133.69



MP-90 MULTI-PURPOSE CLEAR: Medium bodied, fast setting, multi-purpose cement for all classes and schedules with interference fit through 6" diameter, Schedule 80 through 4" diameter. High-strength cement for PVC and CPVC pressure and on ABS and styrene low-pressure systems. Not for use as a transition cement between different materials (i.e., not for PVC-CPVC, PVC-ABS, etc. transitions).

MP-90 Clear Multi-Purpose Cement

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
MP90C-005	1/4 Pint	24	0	708	9.36
MP90C-010	1/2 Pint	24	0	708	13.72
MP90C-020	Pint	12	0	708	23.01
MP90C-030	Quart	12	0	708	38.40