




**Fabricated Fittings Technical**  
**PVC Low Head PIP Fabricated Fittings, Risers & Accessories**

**Low Head PIP Cross**


Socket x Socket x Socket x Socket

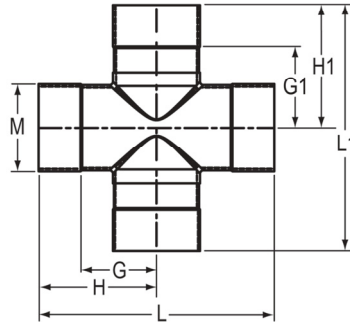

Part Number	Size	G	G1	H	H1	L	L1	M	Approx. Wt. (Lbs.)
<a href="#">280-103286</a>	6	5-1/2	5-7/8	8-1/2	8-7/8	17	17-3/4	6-1/4	2.24
<a href="#">280-103291</a>	8	6-9/16	6-13/16	10-9/16	10-13/16	21-1/8	21-5/8	8-5/16	4.07
<a href="#">280-103297</a>	10	7-9/16	8-13/16	12-9/16	13-13/16	25-1/8	27-5/8	10-7/16	8.32
<a href="#">280-103304</a>	12	8-11/16	9-13/16	13-11/16	14-13/16	27-3/8	29-5/8	12-1/2	12.33
<a href="#">280-103321</a>	15	11-15/16	12-5/16	16-15/16	17-5/16	33-7/8	34-5/8	15-5/8	20.79
<a href="#">280-103342</a>	18	13-9/16	13-13/16	19-9/16	19-13/16	39-1/8	39-5/8	18-3/4	34.36
<a href="#">280-103354</a>	20	15	15-13/16	21-1/2	21-13/16	43	43-5/8	20-13/16	47.24

**Low Head PIP Wye**

Socket x Socket x Socket




Part Number	Size	G	G1	G2	H	H1	H2	L	M	M1	Approx. Wt. (Lbs.)
<a href="#">2875-060</a>	6	3-11/16	10-15/16	9-13/16	6-11/16	13-15/16	12-13/16	19-1/2	6-1/4	6-1/4	3.89
<a href="#">2875-080</a>	8	4-5/8	13-13/16	12-3/4	8-5/8	17-13/16	16-3/4	25-3/8	8-5/16	8-5/16	4.53
<a href="#">2875-100</a>	10	5-11/16	16-3/4	15-15/16	10-11/16	21-3/4	20-15/16	31-5/8	10-7/16	10-7/16	8.75
<a href="#">2875-120</a>	12	6-11/16	19-1/8	18-15/16	11-11/16	24-1/8	23-15/16	35-5/8	12-1/2	12-1/2	14.00
<a href="#">2875-150</a>	15	8-7/16	23-9/16	23-11/16	13-7/16	28-9/16	28-11/16	42-1/8	15-5/8	15-5/8	25.44
<a href="#">2875-183</a>	18	7-3/16	25-9/16	25-9/16	13-3/16	31-9/16	31-9/16	44-3/4	18-3/4	18-3/4	39.97
<a href="#">2875-200</a>	20	9-5/8	30	30	16-1/8	36-1/2	36-1/2	52-5/8	20-13/16	20-13/16	55.48

**Fabricated Fittings Technical**  
**PVC Low Head PIP Fabricated Fittings, Risers & Accessories**



**Low Head PIP Double Wye**


Socket x Socket x Socket x Socket

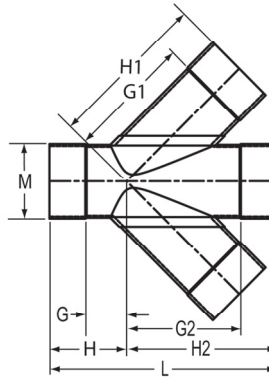

Part Number	Size	G	G1	G2	H	H1	H2	L	M	Approx. Wt. (Lbs.)
<a href="#">2876-060</a>	6	3-11/16	10-15/16	9-13/16	6-11/16	13-15/16	12-13/16	19-1/2	6-1/4	3.19
<a href="#">2876-080</a>	8	4-5/8	13-13/16	12-3/4	8-5/8	17-13/16	16-3/4	25-3/8	8-5/16	5.74
<a href="#">2876-100</a>	10	5-11/16	16-3/4	15-15/16	10-11/16	21-3/4	20-15/16	31-5/8	10-7/16	11.51
<a href="#">2876-120</a>	12	6-11/16	19-1/8	18-15/16	11-11/16	24-1/8	23-15/16	35-5/8	12-9/16	15.58
<a href="#">2876-150</a>	15	8-7/16	23-9/16	23-11/16	13-7/16	28-9/16	28-11/16	42-1/8	15-5/8	34.21
<a href="#">2876-183</a>	18	7-3/16	25-9/16	25-9/16	13-3/16	31-9/16	31-9/16	44-3/4	18-3/4	47.99
<a href="#">2876-200</a>	20	9-5/8	30	30	16-1/8	36-1/2	36-1/2	52-5/8	20-13/16	75.66

**Low Head IPS x PIP Adapter**

Socket x Socket



Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
<a href="#">280-101649</a>	6	7-7/8	6-7/8	6-3/8	1-3/8	.99
<a href="#">280-101650</a>	8	9-7/8	8-15/16	8-1/2	1-3/8	2.26
<a href="#">280-101651</a>	10	11-3/4	11-1/8	10-5/8	1-3/4	4.38
<a href="#">280-101652</a>	12	11-13/16	13-1/4	12-3/4	1-13/16	6.05